

# PLL & UHF DUAL CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ 2x16 Selectable UHF channel
- ※ Adopt PLL-Synthesized control technic
- ※ LCD information display
- ※ Balanced XLR and unbalanced 1/4" outputs




PT-35 BODYPACK TRANSMITTER

HT-35 HANDHELD TRANSMITTER

HT-35A HANDHELD TRANSMITTER


Top View

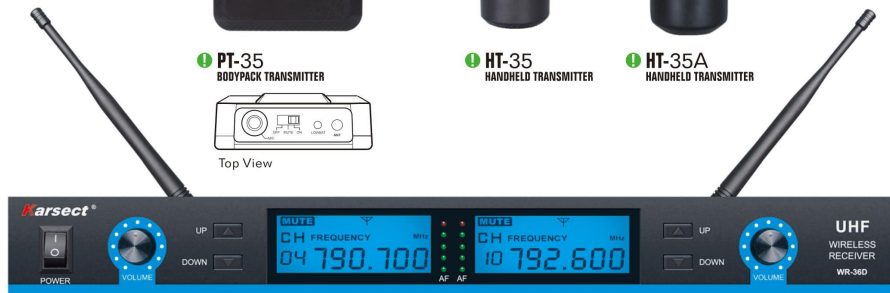

WR-36D DUAL CHANNEL RECEIVER



Rechargeable Receiver



Rear Panel

PLL 16CH

# WR-36D SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## WR-36D



### RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz  
 Image & Squious Rejection:> 70dB  
 Receiving Sensitivity:-105dBm  
 Signal/Noise Ratio:-105dB  
 Border Upon Channel Rejection>70dB  
 T.H.D.<1%  
 Audio Output Level:0-300mV  
 Power Requirements:13-15V DC nominal 1000mA  
 Dimensions:39.6x23.5x5cm

## HT-35/HT-35A



### HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz  
 RF Output:>10dBm  
 Modulation Type:FM  
 Max Deviation:±40KHz  
 Spurious Emission:>55dBc  
 Nominal Current Drain:<40mA  
 Power Requirements: 2x1.5V AA  
 HT-35 Dimensions: 23.5x5x5cm  
 HT-35A Dimensions: 25x5.1x5.1cm

## PT-35



### BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz  
 RF Output:>10dBm  
 Modulation Type:FM  
 Max Deviation:±40KHz  
 Spurious Emission:>53dBc  
 Nominal Current Drain:<40mA  
 Power Requirements: 2x1.5V AA  
 Dimensions:10.5x6.5x3cm

## HANDHELD




Receiver: WR-36D  
 Handheld Mic: HT-35/HT-35A

## LAVALIER



Receiver:WR-36D  
 Bodypack Transmitter:PT-35  
 Lavalier Mic:LT-4A

## HEADWORN

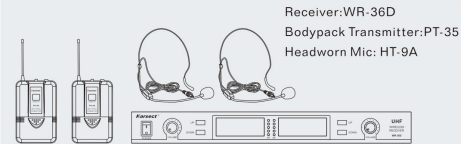

Receiver:WR-36D  
 Bodypack Transmitter:PT-35  
 Headworn Mic: HT-9A

## GUITAR/BASS



Receiver:WR-36D  
 Bodypack Transmitter:PT-35  
 Guitar Cable:G-05

## DUAL CHANNEL COMBO



Receiver: WR-36D  
 Handheld Mic: HT-35/HT-35A  
 Body pack Transmitter: PT-35  
 Lavalier Mic: LT-4A  
 Headworn Mic: HT-9A  
 Guitar Cable:G-05