


PLL & UHF DUAL CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 2x48 Selectable UHF channel
- ※ Adopt PLL-Synthesized control technic
- ※ LCD information display
- ※ Balanced XLR and unbalanced 1/4" outputs



PT-35 BODYPACK TRANSMITTER



Top View




HT-35 HANDHELD TRANSMITTER

HT-35A HANDHELD TRANSMITTER



WR-37D DUAL CHANNEL RECEIVER



Rear Panel

PLL 48CH

WR-37D SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-37D



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Image & Squirious Rejection:> 70dB
 Receiving Sensitivity:-105dBm
 Signal/Noise Ratio:-105dB
 Border Upon Channel Rejection>70dB
 T.H.D.<1%
 Audio Output Level:0-300mV
 Power Requirements:DC13-15V or
 AC:110V / 60Hz or 220V 50Hz
 Dimensions:39.6x23.5x5cm

HT-35/HT-35A



HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:> 10dBm
 Modulation Type:FM
 Max Deviation:±40KHz
 Spurious Emission:>55dBc
 Nominal Current Drain:<40mA
 Power Requirements:2x1.5V AA
 HT-35 Dimensions: 23.5x5x5cm
 HT-35A Dimensions: 25x5.1x5.1cm

PT-35



BODYPACK TRANSMITTER SPECIFICATIONS


RF Frequency Range:460-970MHz
 RF Output:> 10dBm
 Modulation Type:FM
 Max Deviation:±40KHz
 Spurious Emission:>53dBc
 Nominal Current Drain:<40mA
 Power Requirements:2x1.5V AA
 Dimensions:10.5x6.5x3cm

HANDHELD




Receiver: WR-37D
 Handheld Mic: HT-35/HT-35A

LAVALIER

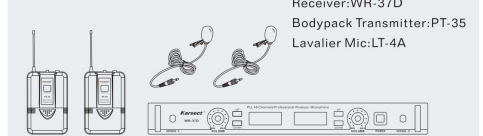

Receiver:WR-37D
 Bodypack Transmitter:PT-35
 Lavalier Mic:LT-4A

HEADWORN

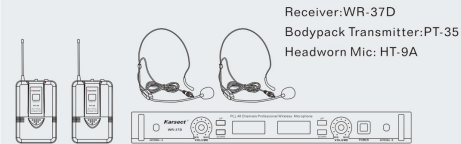


Receiver:WR-37D
 Bodypack Transmitter:PT-35
 Headworn Mic: HT-9A

GUITAR/BASS



Receiver:WR-37D
 Bodypack Transmitter:PT-35
 Guitar Cable:G-05

DUAL CHANNEL COMBO

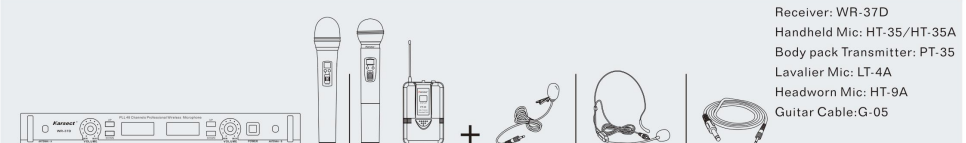

Receiver: WR-37D
 Handheld Mic: HT-35/HT-35A
 Body pack Transmitter: PT-35
 Lavalier Mic: LT-4A
 Headworn Mic: HT-9A
 Guitar Cable:G-05