

PLL & UHF FOUR CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 4x16 Selectable UHF channel (working in group mode).
- ※ Adopt PLL-Synthesized control technic
- ※ LCD information display
- ※ Balanced XLR and unbalanced 1/4" outputs




PT-35 BODYPACK TRANSMITTER
Top View

HT-35 HANDHELD TRANSMITTER

HT-35A HANDHELD TRANSMITTER

WR-35&4 FOUR CHANNEL RECEIVER



PLL 16CH

WR-35&4 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-35&4



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
Image & Squirrel Rejection:>70dB
Receiving Sensitivity:>105dBm
Signal/Noise Ratio:>85dB
Border Upon Channel Rejection>70dB
T.H.D.<0.5%
Audio Output Level:0-300mV
Power Requirements:13-15V DC nominal 1000mA
Dimensions:39.4x20.5x5.2cm

HT-35/HT-35A



HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
RF Output:>10dBm
Modulation Type:FM
Max Deviation:±40KHz
Spurious Emission:>55dBc
Nominal Current Drain:<40mA
Power Requirements: 2x1.5V AA
HT-35 Dimensions: 23.5x5x5cm
HT-35A Dimensions: 25x5.1x5.1cm

PT-35




BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
RF Output:>10dBm
Modulation Type:FM
Max Deviation:±40KHz
Spurious Emission:>53dBc
Nominal Current Drain:<40mA
Power Requirements: 2x1.5V AA
Dimensions:10.5x6.5x3cm

HANDHELD

Receiver: WR-35&4
Handheld Mic: HT-35/HT-35A

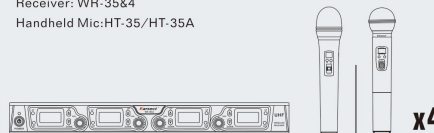

LAVALIER

Receiver:WR-35&4
Bodypack Transmitter:PT-35
Lavalier Mic:LT-4A



HEADWORN

Receiver:WR-35&4
Bodypack Transmitter:PT-35
Headworn Mic: HT-9A



GUITAR/BASS

Receiver:WR-35&4
Bodypack Transmitter:PT-35
Guitar Cable:G-05



FOUR CHANNEL COMBO



Receiver: WR-35&4
Handheld Mic: HT-35/HT-35A
Body pack Transmitter: PT-35
Lavalier Mic: LT-4A
Headworn Mic: HT-9A
Guitar Cable:G-05