

UHF ANTENNA DIVERSITY SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Antenna diversity single channel operation.
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.



KRU-301 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-301



KST-5U



KLT-8U



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Image & Squirious Rejection:>70dB
 Receiving Sensitivity:-105dBm
 Signal/Noise Ratio:-105dB
 Border Upon Channel Rejection>70dB
 T.H.D.:<1%
 Audio Output Level:0-300mV
 Power Requirements:13-15V DC nominal 300mA
 Dimensions:21.3x15x4.3cm

HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 40KHz
 Spurious Emission:>55dBc
 Nominal Current Drain:<40mA
 Power Requirements:9V DC
 Dimensions:20x21x4.9cm


BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 40KHz
 Spurious Emission:>53dBc
 Nominal Current Drain:<40mA
 Power Requirements:9V DC
 Dimensions:10.5x6.5x2.5cm

HANDHELD



LAVALIER

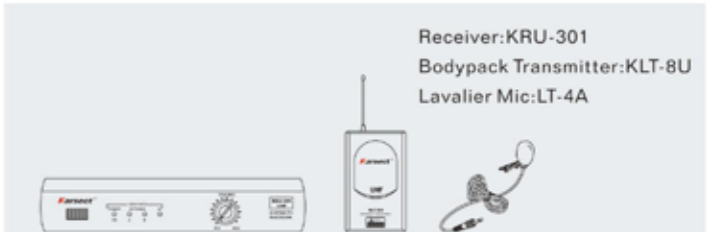

HEADWORN



GUITAR/BASS

