

VHF SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ VHF 200MHz operation frequency
- ※ Single channel operation
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Unbalanced 1/4" output.



KRV-100 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRV-100



RECEIVER SPECIFICATIONS

Carrier Frequency: VHF 170-260MHz
 Power Requirements:13-15V DC nominal 300mA
 Signal/Noise Ratio:MORE THAN 90dB
 Image And Spurious Rejection:MORE THAN 80dB
 Border Upon Channel Rejection:MORE THAN 85dB
 Receiving Sensitivity:-105dBm
 Dimensions:17.8x11.8x4cm

KST-53V



HANDHELD TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery
 Nominal Current Drain:LESS THAN 25mA
 Modulation Type:FM
 RF Output:MORE THAN 13dBm
 Max Deviation:± 35KHz
 Spurious Emission:MORE THAN 55dB
 Dimensions:23.5x5x5cm


KLT-80V



BODYPACK TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery
 Nominal Current Drain:LESS THAN 25mA
 Modulation Type:FM
 RF Output:MORE THAN 13dBm
 Max Deviation:± 35KHz
 Spurious Emission:MORE THAN 55dB
 Dimensions:10.4x6.4x3.1 CM


HANDHELD

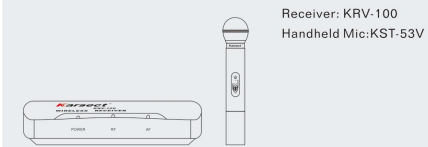

LAVALIER



HEADWORN

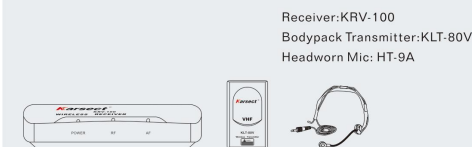

GUITAR/BASS

