

# VHF DUAL CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ VHF 200MHz operation frequency
- ※ Dual channel operation
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.



# KRV-20 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## KRV-20



### RECEIVER SPECIFICATIONS

Carrier Frequency: VHF 170-260MHz  
 Power Requirements:13-15V DC nominal 300mA  
 Signal/Noise Ratio:MORE THAN 90dB  
 Border Upon Channel Rejection:MORE THAN 85dB  
 Image And Spurious Rejection:MORE THAN 80dB  
 Audio Output Level:0-300mA  
 Receiving Sensitivity:-105dBm  
 Dimensions:21.3x15x4.3cm

## KST-53V



### HANDHELD TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery  
 Nominal Current Drain:LESS THAN 25mA  
 Modulation Type:FM  
 RF Output:MORE THAN13dBm  
 Max Deviation: ± 35KHz  
 Spurious Emission:MORE THAN 55dB  
 Dimensions:23.5x5x5cm


## KLT-80V




### BODYPACK TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery  
 Nominal Current Drain:LESS THAN 25mA  
 Modulation Type:FM  
 RF Output:MORE THAN 13dBm  
 Max Deviation: ± 35KHz  
 Spurious Emission:MORE THAN 55dB  
 Dimensions:10.4x6.4x3.1CM

## HANDHELD

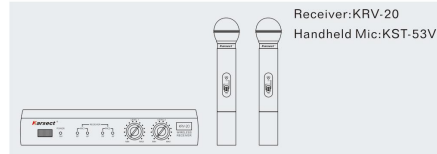


## LAVALIER

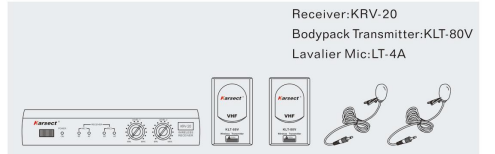

## HEADWORN



## GUITAR/BASS

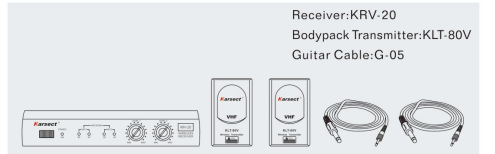

## DUAL CHANNEL COMBO

