

INFRARED DUAL CHANNEL SYSTEM

SYSTEM FEATURES


- ※ Adopt infrared transferring for wireless system.
- ※ 360 degree strong transferring capacity.
- ※ Dynamic audio frequency compression. Expander circuit.
- ※ Reinforced metal windscreen for microphone.
- ※ Can be connected with 4 PCS infrared transmission connectors to build up the signal.
- ※ With special microphone rechargeable socket and battery rechargeable jack.



① IR-5C
RECHARGEABLE TABLE STAND



① IR-5R
DUAL CHANNEL RECEIVER



Rear Panel



① IR-5T
HANDHELD TRANSMITTER


IR-5R SERIES >>>

PROFESSIONAL INFRARED WIRELESS MICROPHONE SYSTEM

IR-5R



If infrared signal is weak when receiving. Please use more infrared transmission connectors to build up the signal the system can be used within 4 PCS infrared transmission connectors (attached 10m connector extending line)

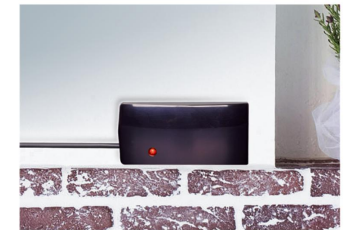

IR-5T HANDHELD TRANSMITTER

This is the handheld system designed for singers who desire the high quality of KARSECT microphones and freedom of wireless performance. And it can be recharged by the separate rechargeable table stand or it can be recharged in the receiver directly without any table stand, the receiver with the rechargeable feature.

IR-5R



RECEIVER SPECIFICATIONS

Power Requirement:13-15V DC nominal 500mA
Carrier Frequency:CH.A-2.539MHz
CH.B-2.079MHz
CH.B-2.079MHz
Direction:Uni-direction
Transmitting Distance:Approximately 16M
Wavelength:850nm
Dimensions:13.7x14.2x3.8cm

IR-5T



SPECIFICATIONS

Carrier Frequency:CH.A-2.539MHz or
CH.B-2.079MHz
Max Modulation:20KHz
Modulation Type:IR
Battery:3V(2x1.5V AA)
Dimensions:26x5.6x5.6cm

IR-5C



RECHARGEABLE TABLE STAND SPECIFICATIONS

Power Requirement:13-15V nominal 600mA
Recharging Time:Not less than 4 hours
Dimensions:14x6.7x7.2cm