

PLL & UHF ANTENNA DIVERSITY DUAL CHANNEL SYSTEM

SYSTEM FEATURES

- * 2x16 Selectable UHF channel.
- * Adopt the PLL-Synthesized control technic.
- * Antenna diversity dual channel operation.
- * LED information display
- * Double squelch operation circuit, higher efficient and much more steady.
- * Adjustable antenna, enhance receiving signal function.
- * Receiver with auto-searching function.
- * Install with surface acoustic filter avoiding interruption from other signal and noise
- * Balanced XLR and unbalanced 1/4" outputs.



PLL 16CH

KRU-162 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-162



RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz
Power Requirement:
13-15V DC nominal 800mA
S/N Ratio:>90dB
RF Image Spurious Rejection:>80dB
Border Upon Channel Rejection:>80dB
Receiving Sensitivity:
> -105dBm(S/N:-12dB 15KHz)
Dimensions:21.3x15x4.3cm

KST-6U



HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
RF Output:10dBm
Modulation Type:FM
Max Deviation: ± 68KHz
Spurious Emission:>55dBc
Power Requirements:3V (2x1.5V AA)
Dimensions:24.2x5x5cm

KLT-6U



BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
RF Output:10dBm
Modulation Type:FM
Max Deviation: ± 68KHz
Spurious Emission:>55dBc
Power Requirements:3V(2x1.5V AA)
Dimensions:8.3x6.7x2.5cm


G-10H



RECHARGEABLE TABLE STAND

Power Requirement:DC 12V
Recharging Time:Not less than 4 hours
Dimensions:16.5x8.5x9cm


HANDHELD

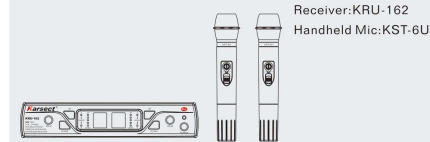

LAVALIER



HEADWORN

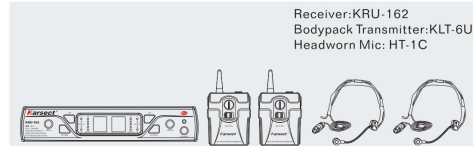

GUITAR/BASS



DUAL CHANNEL COMBO

