

HEADSET MIC SERIES >>>


THERE ARE HEADSET MICROPHONES WHICH FOR YOUR CHOICE

HT-1



HEADSET MIC SPECIFICATIONS

| | |
|----------------------------|-------------------------|
| Type: | Back Electret Condenser |
| Direction: | Cardioid |
| Frequency Response: | 60-121CHz |
| S/N Ratio: | 24dB |
| Phantom Power Requirement: | DC1.5-10V |

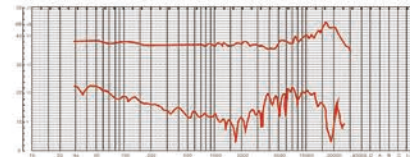


HT-3



HEADSET MIC SPECIFICATIONS

| | |
|---------------------|-------------------------------|
| Type: | Back Electret Condenser |
| Direction: | Omni-directional |
| Frequency Response: | 100-101CHz |
| Sensitivity: | -42dB ± 2dB (0dB=1V/Pa1KHz) |
| Output Impedance: | < 200Ω |

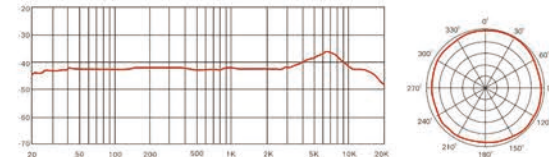


HT-6



HEADSET MIC SPECIFICATIONS

| | |
|-----------------------------|----------------|
| Polar pattern: | unidirectional |
| Mic diameter: | Φ9.7x5.2 mm |
| Sensitivity: | -47dB ± 2dB |
| Frequency Range: | 20-20KHz |
| Output Impedance: | ≤ 680 Ω |
| SNR: | > 58dB |
| Standard Operation Voltage: | 1.0V-10V.DC |




HT-7



HEADSET MIC SPECIFICATIONS

| | |
|-----------------------------|----------------|
| Polar pattern: | unidirectional |
| Mic diameter: | Φ9.7x5.2 mm |
| Sensitivity: | -47dB ± 2dB |
| Frequency Range: | 20-20KHz |
| Output Impedance: | ≤ 680 Ω |
| SNR: | > 58dB |
| Standard Operation Voltage: | 1.0V-10V.DC |




HT-4



HEADSET MIC SPECIFICATIONS

| | |
|----------------------------|-------------------------|
| Type: | Back Electret Condenser |
| Direction: | Uni-directional |
| Frequency Response: | 100~101CHz |
| Sensitivity: | -48dB ± 2dB |
| Phantom Power Requirement: | DC1.0V~10V |

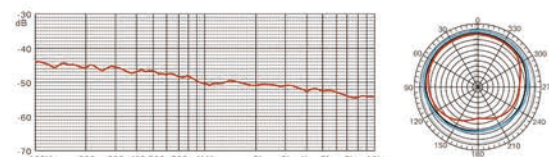


HT-5



HEADSET MIC SPECIFICATIONS

| | |
|----------------------------|-------------------------|
| Type: | Back Electret Condenser |
| Direction: | Uni-directional |
| Frequency Response: | 100~101CHz |
| Sensitivity: | -48dB ± 2dB |
| Phantom Power Requirement: | DC1.0V~10V |

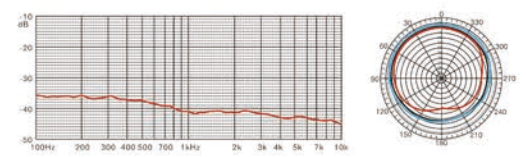


HT-8



HEADSET MIC SPECIFICATIONS

| | |
|-----------------------------|----------------|
| Polar pattern: | unidirectional |
| Mic diameter: | Φ6.0x5.0mm |
| Sensitivity: | -47dB ± 2dB |
| Frequency Range: | 20-20KHz |
| Output Impedance: | ≤ 2.2K Ω |
| SNR: | > 58dB |
| Standard Operation Voltage: | 2.0V-10V.DC |



HT-9



HEADSET MIC SPECIFICATIONS

| | |
|-----------------------------|----------------|
| Polar pattern: | unidirectional |
| Mic diameter: | Φ9.7x5.5mm |
| Sensitivity: | -39dB ± 2dB |
| Frequency Range: | 20-20KHz |
| Output Impedance: | ≤ 2.2K Ω |
| SNR: | > 58dB |
| Standard Operation Voltage: | 1.0V-10V.DC |

