


PLL & UHF TRUE DIVERSITY SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 100 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ True diversity single channel operation.
- ※ LCD information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.



PT-700 BODYPACK TRANSMITTER

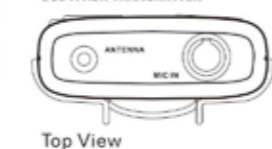

Top View



WR-710 TRUE DIVERSITY RECEIVER

HT-700 HANDHELD TRANSMITTER



Rear Panel

PLL 100CH

WR-710 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-710



HT-700



PT-700



C-700H



RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz
 Power Requirement:13-15V DC 800mA
 S/N Ratio:>90dB
 RF Image Spurious Rejection:>80dB
 Border Upon Channel Rejection:>80dB
 Receiving Sensitivity:
 >-105dBm(S/N:-12dB 15KHz)
 Dimensions:20.5x17.6x4.5cm

HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:23.7x4.8x4.8cm

BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:8.5x6.2x2.2cm

RECHARGEABLE TABLE STAND

Power Requirement:DC 12V
 Recharging Time:Not less than 4 hours
 Dimensions:18.8x12.3x9.1cm

HANDHELD




Receiver:WR-710
Handheld Mic:HT-700

LAVALIER



Receiver:WR-710
Bodypack Transmitter:PT-700
Lavalier Mic:LT-4C

HEADWORN

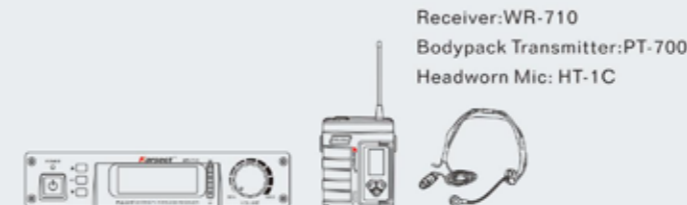

Receiver:WR-710
Bodypack Transmitter:PT-700
Headworn Mic: HT-1C

GUITAR/BASS



Receiver:WR-710
Bodypack Transmitter:PT-700
Guitar Cable:G-05C