

# VHF TRUE DIVERSITY SINGLE CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ VHF 200MHz operation frequency
- ※ True diversity single channel operation.
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack metal housing with rack ear.



## KRV-201 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

### KRV-201



#### RECEIVER SPECIFICATIONS

Carrier Frequency: VHF 170-260MHz  
 Power Requirements:13-15V DC nominal 300mA  
 Signal/Noise Ratio: MORE THAN 90dB  
 Image And Spurious Rejection: MORE THAN 80dB  
 Border Upon Channel Rejection: MORE THAN 85dB  
 Audio Output Level:0-300mV  
 Receiving Sensitivity:-105dBm  
 Dimensions:21x26.5x4.3cm

### KST-53V



#### HANDHELD TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery  
 Nominal Current Drain:LESS THAN 25mA  
 Modulation Type:FM  
 RF Output:MORE THAN13dBm  
 Max Deviation:±35KHz  
 Spurious Emission:MORE THAN 55dB  
 Dimensions:23.5x5x5cm


### KLT-80V




#### BODYPACK TRANSMITTER SPECIFICATIONS

Power Requirement:9V Alkaline Battery  
 Nominal Current Drain:LESS THAN 25mA  
 Modulation Type:FM  
 RF Output:MORE THAN 13dBm  
 Max Deviation:± 35KHz  
 Spurious Emission:MORE THAN 55dB  
 Dimensions:10.4x6.4x3.1 CM

### HANDHELD

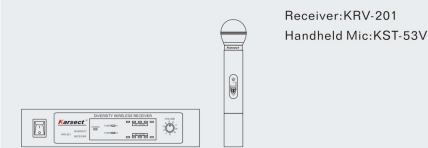

### LAVALIER

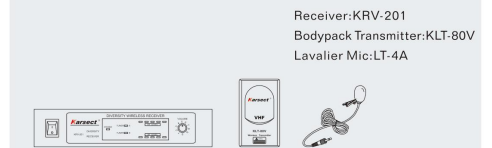

### HEADWORN



### GUITAR/BASS

