

PLL & UHF TRUE DIVERSITY SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 100 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ True diversity single channel operation.
- ※ LCD information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.



WR-610 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-610



RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz
 Power Requirement:13-15V DC 800mA
 S/N Ratio:>90dB
 RF Image Spurious Rejection:>80dB
 Border Upon Channel Rejection:>80dB
 Receiving Sensitivity:>-105dBm(S/N:-12dB 15KHz)
 Dimensions:20.4x16x4.5cm

HT-600



HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:24x5.1x5.1cm

PT-600



BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:6.2x7.4x2.5cm


HANDHELD



LAVALIER



HEADWORN

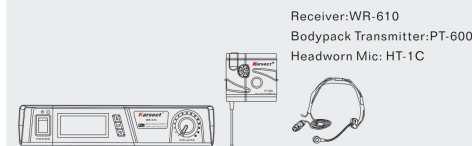

GUITAR/BASS

